


Sartorius® Combics

Explosion Proof Bench and Floor Platforms



APPROVALS

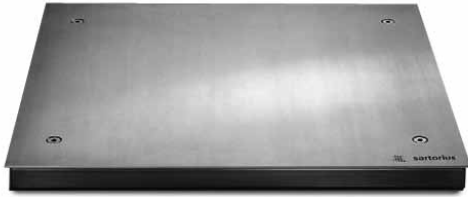

SPECIFICATIONS

CABLE LENGTH:

Up to 30 x 30 - 10 ft
36 x 36 and over - 20 ft

OPERATING TEMPERATURE:

+14°F to 104°F

RATING:

NEMA 4/IP65

INDICATOR OPTION:

CIX53-U

WARRANTY:

Two-year limited warranty
Accessories one year

STANDARD FEATURES

- Cost-effective industrial weighing
- Various materials and finishes
- FM Approved: Classes 1,2,3, Division 1, Groups ABCDEGFT4, US and Canadian hazardous areas, when used with CIX53-U or FCT01-X indicator
- Can be used in areas where explosive gas and dust mixtures occur
- Documentation to verify intrinsic safety available upon request
- Completely constructed with AISI 304 stainless steel
- All units are built for easy cleaning and disinfection and meet HACCP and FDA requirements for the food industry.
- Load cells are hermetically sealed, IP68 protection rated
- Load cell cables are 10ft (for bases up to 30in x 30in) or 20ft (for bases 36in x 36in and larger)
- NEMA4/IP65 protection rated
- Pit frames for flush mounting available
- High resolution 30,000 dd
- Compatible with all Combics indicators

OPTIONAL CONFIGURATIONS

- Custom sizes available
- AISI 316Ti stainless steel platforms and base frames
- AISI 316Ti stainless steel pans and base frames
- AISI 304 Complete, AISI 304 treadplate (R4) (36in x 36in and larger)
- AISI 304 pressure lift system (T1) (36in x 36in and larger)
- Platform AISI 316Ti, base frame 304 (R2)
- Platform and base AISI 316Ti stainless steel (R2+S2)
- Load ramps and pit frames

APPLICATIONS

- Pharmaceutical, chemical, electronics, food processing, precious metals, metal production and processing

REGULATORY COMPLIANCE

- NEMA, HACCP, FDA, GLP/GMP*, FM

*GLP/GMP requires use of Combics 1 Plus or higher digital weight indicator

Sartorius® Combics

Stainless Steel

RLWS PN	SARTORIUS PN	DIMENSIONS (IN)	HEIGHT ADJUSTMENT (IN)	# LOAD CELLS	CAPACITY READABILITY (LB)		CAPACITY READABILITY (KG)		EST. SHIP WEIGHT (LB)	LIST PRICE
100919	CAPXS1U-10CC	10 x 10	2.37	1	15	0.0005	6	0.0002	16	Consult
100920	CAPXS1U-20CC	10 x 10	2.37	1	30	0.001	15	0.0005	16	Consult
100921	CAPXS1U-50CC	10 x 10	2.37	1	60	0.002	30	0.001	16	Consult
100922	CAPXS1U-50DD	12 X 12	3.87	1	60	0.002	30	0.001	24	Consult
100923	CAPXS1U-100DD	12 X 12	3.87	1	150	0.005	60	0.002	24	Consult
100924	CAPXS1U-50EE	18 x 18	3.5	1	60	0.002	30	0.001	62	Consult
100925	CAPXS1U-100EE	18 x 18	3.5	1	150	0.005	60	0.002	62	Consult
100926	CAPXS1U-200EE	18 x 18	3.5	1	200	0.01	100	0.005	62	Consult
100930	CAPXS4U-50GE	24 X 18	3.31	4	60	0.002	30	0.001	99	Consult
100931	CAPXS4U-100GE	24 X 18	3.31	4	150	0.005	60	0.002	99	Consult
100932	CAPXS4U-200GE	24 X 18	3.31	4	300	0.01	150	0.005	99	Consult
100933	CAPXS4U-100GG	24 X 24	3.31	4	150	0.005	60	0.002	12	Consult
100934	CAPXS4U-250GG	24 X 24	3.31	4	300	0.01	150	0.005	12	Consult
100935	CAPXS4U-500GG	24 X 24	3.31	4	600	0.02	300	0.01	12	Consult
100936	CAPXS4U-100HG	30 X 24	3.31	4	150	0.005	60	0.002	143	Consult
100927	CAPXS4U-250HG	30 X 24	3.31	4	300	0.01	150	0.005	143	Consult
100938	CAPXS4U-500HG	30 X 24	3.31	4	600	0.02	300	0.01	143	Consult
100939	CAPXS4U-1000HG	30 X 24	3.31	4	1500	0.05	600	0.02	143	Consult
100941	CAPXS4U-100HH	30 X 30	3.31	4	150	0.005	60	0.002	143	Consult
100942	CAPXS4U-250HH	30 X 30	3.31	4	300	0.01	150	0.005	187	Consult
100943	CAPXS4U-500HH	30 X 30	3.31	4	600	0.02	300	0.01	187	Consult
100944	CAPXS4U-1000HH	30 X 30	3.31	4	1500	0.05	600	0.02	187	Consult
100945	CAPXS4U-1000KK	36 X 36	3.75	4	1500	0.05	600	0.02	250	Consult
100946	CAPXS4U-2500KK	36 X 36	3.75	4	3000	0.1	1500	0.05	250	Consult
100947	CAPXS4U-5000KK	36 X 36	3.75	4	6000	0.2	3000	0.1	250	Consult
100948	CAPXS4U-1000NN	48 X 48	3.75	4	1500	0.05	600	0.02	390	Consult
100949	CAPXS4U-2500NN	48 X 48	3.75	4	3000	0.1	1500	0.05	390	Consult
100950	CAPXS4U-5000NN	48 X 48	3.75	4	6000	0.2	3000	0.1	390	Consult
100951	CAPXS4U-10000NN	48 X 48	3.75	4	15,000	0.5	6000	0.2	390	Consult
100952	CAPXS4U-1000RN	60 X 48	4.5	4	1500	0.05	600	0.02	465	Consult
100953	CAPXS4U-2500RN	60 X 48	4.5	4	3000	0.1	1500	0.05	465	Consult
100954	CAPXS4U-5000RN	60 X 48	4.5	4	6000	0.2	3000	0.1	465	Consult
100955	CAPXS4U-10000RN	60 X 48	4.5	4	15,000	0.5	6000	0.2	465	Consult
100956	CAPXS4U-1000RR	60 X 60	4.5	4	1500	0.05	600	0.02	600	Consult
100957	CAPXS4U-2500RR	60 X 60	4.5	4	3000	0.1	1500	0.5	600	Consult
100958	CAPXS4U-5000RR	60 X 60	4.5	4	6000	0.2	3000	0.1	600	Consult
100959	CAPXS4U-10000RR	60 X 60	4.5	4	15,000	0.5	6000	0.2	600	Consult

Explosion Proof