


HOC Single Point, Aluminum



Picture is a representation of actual product

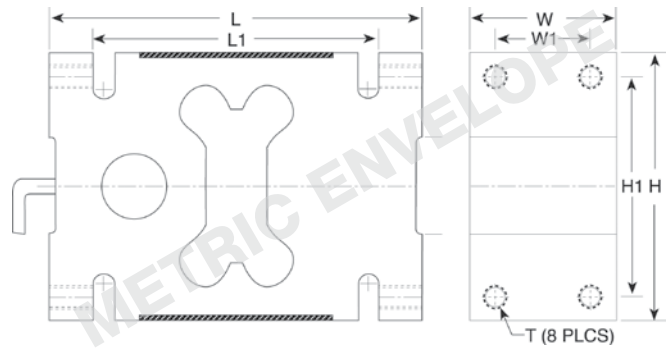

VPG - CELTRON

SPECIFICATIONS

Full Scale Output: 2.0 mV/V	Safe Overload: 150% Full scale	Cable Length: 6 m/19.7'	Warranty: One-year limited warranty
Output Resistance: 350 ohms +/- 3	Rated Excitation: 10V DC (15V maximum)	Cable Color Code: Red+ Excitation Black.....- Excitation Blue+ Sense Brown- Sense Green+ Signal White- Signal	Approvals:
Input Resistance: 410 ohms +/- 10	Total Error: 0.02% Full scale	Insulation Resistance: 5000 megohms	
Material/Finish: Anodized aluminum	Seal Type: Environmentally sealed, potted	Max Platform Size: 4' x 4'	
Temperature: Compensated range 0°F to 150°F/-18°C to 65°C			

DIMENSIONS

RATED CAPACITY	H	H1	L	L1	T	W	W1
kg/mm							
750-2000	125	95.0	176.0	134.5	M16 x 2-6H	76.0	46.0
lb/inches							
1653.8-4409.2	4.92	3.74	6.93	5.30	M16 x 2-6H	2.99	1.81

ORDER INFORMATION

LOAD RATING	PART #	PRICE
750 kg (1653.8 lb)	42117	Consult
1000 kg (2205.0 lb)	42118	Consult
2000 kg (4410.0 lb)	42119	Consult

INTERCHANGEABLE PRODUCTS

MANUFACTURER	MODEL	PAGE #
Vishay TedeA-Huntleigh	1320	348